


# ing Housed Units-Double V-Lock Four-Bolt Pillow Block | QVVPH15V065S

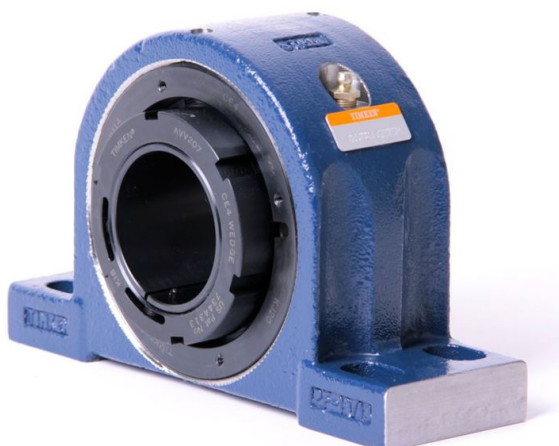

Bearing No. QVVPH15V065S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Metric                                                                                                                 |
| Bearing Number            | 4.67                                                                                                                   |
| Housing Construction      | 3.14                                                                                                                   |
| UPC Code                  | 29 lb13.20 Kg                                                                                                          |
| Shaft Size Type           | 0883450076142<br>0883450076159<br>0883450209120<br>0883450209274<br>0883450221559<br>0883450221702<br>0883450233989 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 65 mm                                                                                                                  |
| Y2 - Geometry Factor      | 0.0030 in0.075 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.095 mm                                                                                                      |
| Shaft Tolerance           | 2900 rpm                                                                                                               |
| Shaft Size                | 1600 rpm                                                                                                               |
| Pre Install Clearance Min | 1300 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |