


# ing Housed Units-Double V-Lock Four-Bolt Pillow Block | QVVPR14V208S

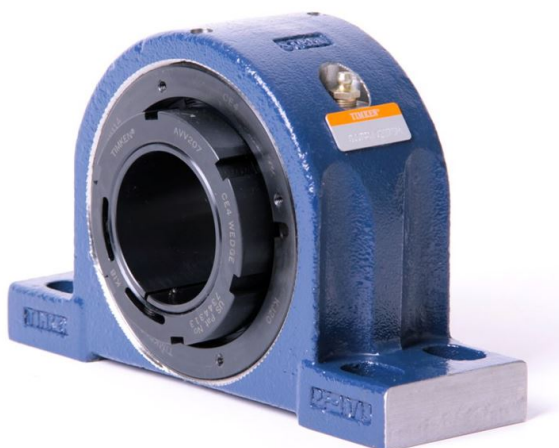

Bearing No. QVVPR14V208S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.32                                                                                                                   |
| Housing Construction      | 2.90                                                                                                                   |
| UPC Code                  | 20 lb9.10 Kg                                                                                                           |
| Shaft Size Type           | 0883450080309<br>0883450080316<br>0883450080347<br>0883450175678<br>0883450175869<br>0883450176057<br>0883450204514 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 2-1/2 in                                                                                                               |
| Y2 - Geometry Factor      | 0.0030 in0.075 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.095 mm                                                                                                      |
| Shaft Tolerance           | 3050 rpm                                                                                                               |
| Shaft Size                | 1700 rpm                                                                                                               |
| Pre Install Clearance Min | 1400 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |