


# loyal

## Housed Units-Single Concentric Four-Bolt Pillow Block | QAPR18A090S

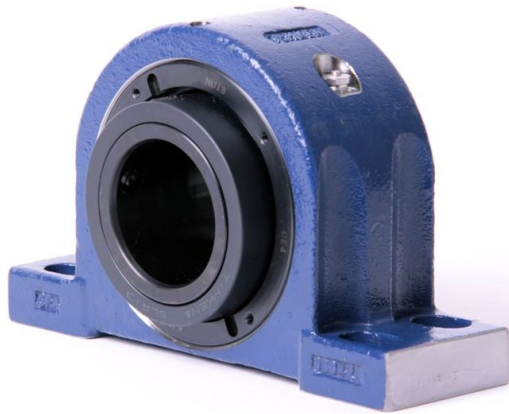

Bearing No. QAPR18A090S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Metric                                                                                                                 |
| Bearing Number            | 4.31                                                                                                                   |
| Housing Construction      | 2.90                                                                                                                   |
| UPC Code                  | 49.0 lb22.2 Kg                                                                                                         |
| Shaft Size Type           | 0883450049108<br>0883450049115<br>0883450049139<br>0883450049146<br>0883450049153<br>0883450049160<br>0883450049177 08 |
| Full Timken Part Number   | 0.0030 in0.076 mm                                                                                                      |
| Locking Style             | 90 mm                                                                                                                  |
| Y2 - Geometry Factor      | 0.0024 in0.060 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0039 in0.100 mm                                                                                                      |
| Shaft Tolerance           | 2400 rpm                                                                                                               |
| Shaft Size                | 1400 rpm                                                                                                               |
| Pre Install Clearance Min | 1000 rpm                                                                                                               |
| Pre Install Clearance Max | Single Concentric                                                                                                      |