


loyal

Housed Units-Double V-Lock Piloted Flange Cartridge | QVVCW12V203S

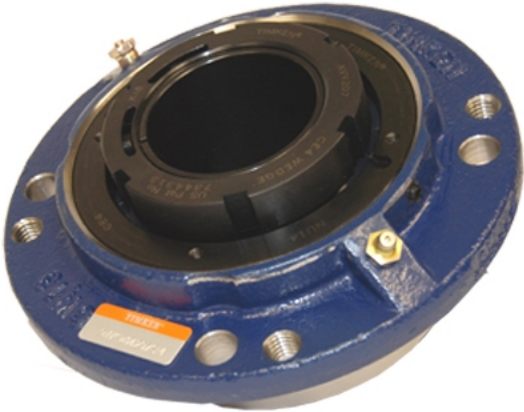

Bearing No. QVVCW12V203S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.23                                                                                                                   |
| Housing Construction      | 2.84                                                                                                                   |
| UPC Code                  | 13 lb5.9 Kg                                                                                                            |
| Shaft Size Type           | 0883450091350<br>0883450091480<br>0883450103794<br>0883450104463<br>0883450109833<br>0883450110020<br>0883450119863 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 2-3/16 in                                                                                                              |
| Y2 - Geometry Factor      | 0.0030 in0.075 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.094 mm                                                                                                      |
| Shaft Tolerance           | 3500 rpm                                                                                                               |
| Shaft Size                | 2000 rpm                                                                                                               |
| Pre Install Clearance Min | 1650 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |