


# Housed Units-Double V-Lock Piloted Flange Cartridge | QVVCW14V207S

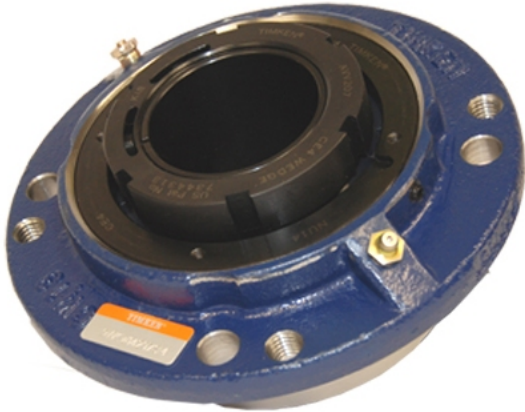

Bearing No. QVVCW14V207S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.32                                                                                                                   |
| Housing Construction      | 2.90                                                                                                                   |
| UPC Code                  | 16 lb7.30 Kg                                                                                                           |
| Shaft Size Type           | 0883450063548<br>0883450071840<br>0883450082419<br>0883450186124<br>0883450186315<br>0883450186506<br>0883450213912 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 2-7/16 in                                                                                                              |
| Y2 - Geometry Factor      | 0.0030 in0.075 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.095 mm                                                                                                      |
| Shaft Tolerance           | 3050 rpm                                                                                                               |
| Shaft Size                | 1700 rpm                                                                                                               |
| Pre Install Clearance Min | 1400 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |