


# ing Housed Units-Tapered Adapter Four-Bolt Pillow Block | TAPH11K115S

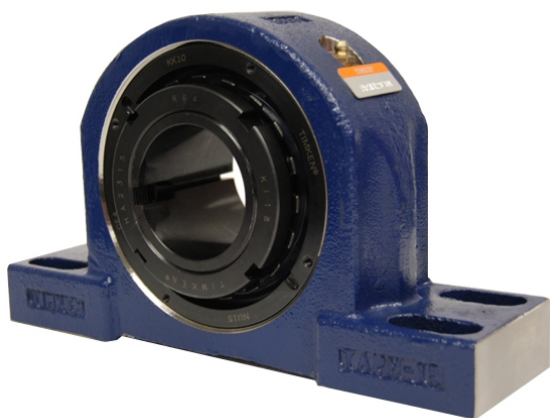

**Bearing No. TAPH11K115S**

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.40                                                                                                                   |
| Housing Construction      | 2.95                                                                                                                   |
| UPC Code                  | 19 lb8.6 Kg                                                                                                            |
| Shaft Size Type           | 0883450128476<br>0883450128483<br>0883450128506<br>0883450128513<br>0883450128520<br>0883450128537<br>0883450128544 08 |
| Full Timken Part Number   | 0.0030 in0.076 mm                                                                                                      |
| Locking Style             | 1-15/16 in                                                                                                             |
| Y2 - Geometry Factor      | 0.0030 in0.076 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.094 mm                                                                                                      |
| Shaft Tolerance           | 0.0015 in0.038 mm                                                                                                      |
| Shaft Size                | 3800 rpm                                                                                                               |
| Pre Install Clearance Min | 2200 rpm                                                                                                               |
| Pre Install Clearance Max | 1800 rpm                                                                                                               |