


# ing Housed Units-Tapered Adapter Four-Bolt Pillow Block | TAPH26K407S

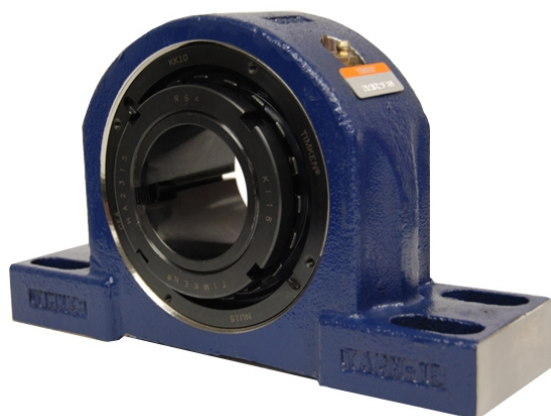

**Bearing No. TAPH26K407S**

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 3.90                                                                                                                   |
| Housing Construction      | 2.62                                                                                                                   |
| UPC Code                  | 136 lb61.70 Kg                                                                                                         |
| Shaft Size Type           | 0883450130172<br>0883450130189<br>0883450130202<br>0883450130219<br>0883450130226<br>0883450130233<br>0883450130240 08 |
| Full Timken Part Number   | 0.0040 in0.102 mm                                                                                                      |
| Locking Style             | 4-7/16 in                                                                                                              |
| Y2 - Geometry Factor      | 0.0063 in0.160 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0079 in0.201 mm                                                                                                      |
| Shaft Tolerance           | 0.0030 in0.076 mm                                                                                                      |
| Shaft Size                | 1500 rpm                                                                                                               |
| Pre Install Clearance Min | 700 rpm                                                                                                                |
| Pre Install Clearance Max | 400 rpm                                                                                                                |