


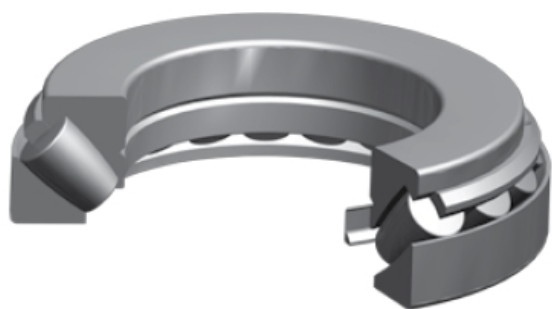

Bearing No. 29468EM

Weight	202.00 mm7.953 in
Thermal Speed Rating	207.0 Kg456.3 lb
T3 - Cup Width	490 rpm
T1 - Cage Position	88.00 mm3.465 in
T - Total Width	123.65 mm4.868 in
Static Load Rating	170.00 mm6.693 in
S - Dimension	22030 kN4953000 lbf
r - Fillet Radius	6.00 mm0.240 in
H - Shoulder Diameter - Shaft (Min)	500.00 mm19.690 in
E - Shoulder Diameter - Housing (Max)	473.00 mm18.620 in
Dynamic Load Rating	5920 kN1331000 lbf
D1 - Cup Bore	431.00 mm16.969 in
d1 - Cone Outside Diameter	550.00 mm21.654 in