


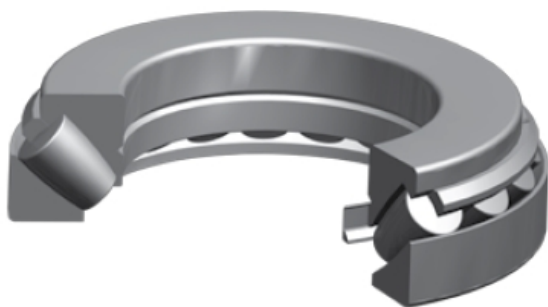

Bearing No. 29464EM

Weight	191.00 mm7.520 in
Thermal Speed Rating	164.0 Kg361.5 lb
T3 - Cup Width	530 rpm
T1 - Cage Position	80.50 mm3.169 in
T - Total Width	112.17 mm4.416 in
Static Load Rating	155.00 mm6.102 in
S - Dimension	18909 kN4251000 lbf
r - Fillet Radius	6.00 mm0.240 in
H - Shoulder Diameter - Shaft (Min)	469.00 mm18.460 in
E - Shoulder Diameter - Housing (Max)	444.00 mm17.480 in
Dynamic Load Rating	5155 kN1159000 lbf
D1 - Cup Bore	407.00 mm16.024 in
d1 - Cone Outside Diameter	514.00 mm20.236 in