


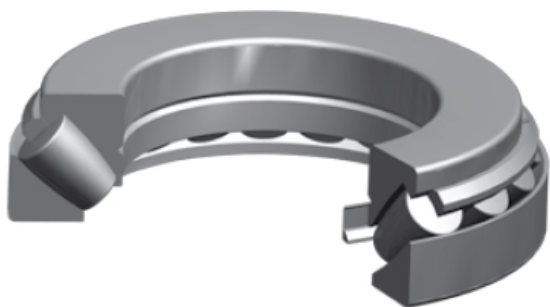

Bearing No. 29376EM

Weight	216.00 mm8.504 in
Thermal Speed Rating	129.7 Kg285.9 lb
T3 - Cup Width	500 rpm
T1 - Cage Position	70.00 mm2.756 in
T - Total Width	94.50 mm3.720 in
Static Load Rating	132.00 mm5.197 in
S - Dimension	17780 kN3996000 lbf
r - Fillet Radius	5.00 mm0.200 in
H - Shoulder Diameter - Shaft (Min)	507.00 mm19.960 in
E - Shoulder Diameter - Housing (Max)	486.00 mm19.130 in
Dynamic Load Rating	4300 kN965500 lbf
D1 - Cup Bore	455.00 mm17.913 in
d1 - Cone Outside Diameter	546.00 mm21.496 in