


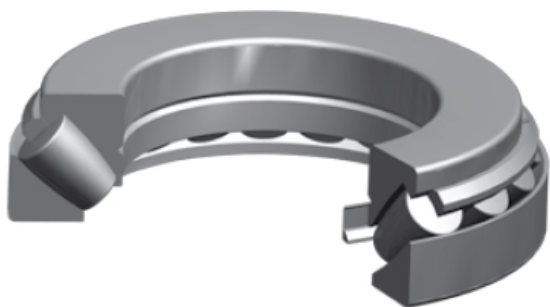

Bearing No. 29384EM

|                                       |                     |
|---------------------------------------|---------------------|
| Weight                                | 235.00 mm9.252 in   |
| Thermal Speed Rating                  | 148.3 Kg326.9 lb    |
| T3 - Cup Width                        | 510 rpm             |
| T1 - Cage Position                    | 67.50 mm2.657 in    |
| T - Total Width                       | 95.80 mm3.772 in    |
| Static Load Rating                    | 140.00 mm5.512 in   |
| S - Dimension                         | 16000 kN3610000 lbf |
| r - Fillet Radius                     | 5.00 mm0.197 in     |
| H - Shoulder Diameter - Shaft (Min)   | 561.00 mm22.087 in  |
| E - Shoulder Diameter - Housing (Max) | 537.00 mm21.142 in  |
| Dynamic Load Rating                   | 4040 kN909000 lbf   |
| D1 - Cup Bore                         | 520.00 mm20.472 in  |
| d1 - Cone Outside Diameter            | 600.00 mm23.622 in  |