


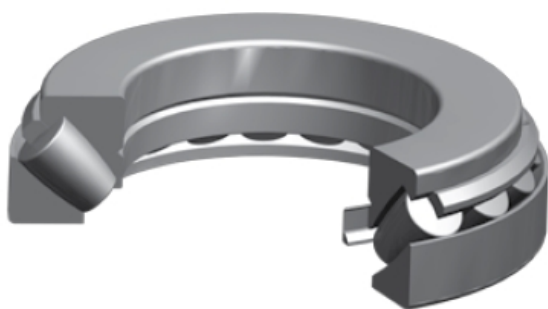

**Bearing No. 29392EM**

|                                       |                     |
|---------------------------------------|---------------------|
| Weight                                | 257.00 mm10.118 in  |
| Thermal Speed Rating                  | 193.6 Kg426.8 lb    |
| T3 - Cup Width                        | 450 rpm             |
| T1 - Cage Position                    | 72.50 mm2.854 in    |
| T - Total Width                       | 105.30 mm4.146 in   |
| Static Load Rating                    | 150.00 mm5.906 in   |
| S - Dimension                         | 20200 kN4540000 lbf |
| r - Fillet Radius                     | 5.00 mm0.197 in     |
| H - Shoulder Diameter - Shaft (Min)   | 614.00 mm24.173 in  |
| E - Shoulder Diameter - Housing (Max) | 589.0 mm23.189 in   |
| Dynamic Load Rating                   | 4820 kN1080000 lbf  |
| D1 - Cup Bore                         | 567.00 mm22.323 in  |
| d1 - Cone Outside Diameter            | 660.00 mm25.984 in  |