


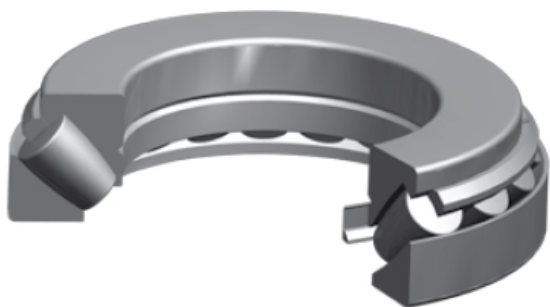

Bearing No. 29488EM

Weight	257.00 mm10.118 in
Thermal Speed Rating	387.4 Kg854.1 lb
T3 - Cup Width	370 rpm
T1 - Cage Position	108.00 mm4.252 in
T - Total Width	148.34 mm5.840 in
Static Load Rating	206.03 mm8.110 in
S - Dimension	33710 kN7579000 lbf
r - Fillet Radius	8.00 mm0.310 in
H - Shoulder Diameter - Shaft (Min)	635.0 mm25.00 in
E - Shoulder Diameter - Housing (Max)	602.00 mm23.700 in
Dynamic Load Rating	8610 kN1935000 lbf
D1 - Cup Bore	554.00 mm21.811 in
d1 - Cone Outside Diameter	694.00 mm27.323 in