


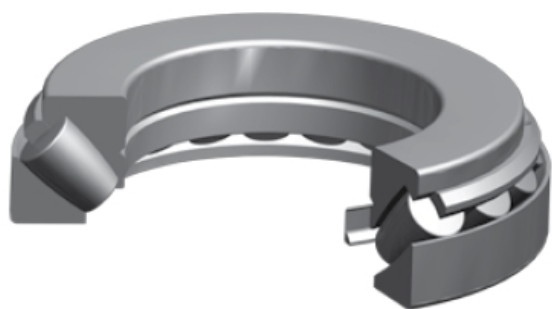

**Bearing No. 29472EM**

|                                       |                     |
|---------------------------------------|---------------------|
| Weight                                | 210.00 mm8.270 in   |
| Thermal Speed Rating                  | 209.2 Kg461.3 lb    |
| T3 - Cup Width                        | 510 rpm             |
| T1 - Cage Position                    | 83.50 mm3.290 in    |
| T - Total Width                       | 119.60 mm4.709 in   |
| Static Load Rating                    | 170.00 mm6.693 in   |
| S - Dimension                         | 19500 kN4380000 lbf |
| r - Fillet Radius                     | 6.00 mm0.240 in     |
| H - Shoulder Diameter - Shaft (Min)   | 528.00 mm20.787 in  |
| E - Shoulder Diameter - Housing (Max) | 498.00 mm19.606 in  |
| Dynamic Load Rating                   | 5440 kN1220000 lbf  |
| D1 - Cup Bore                         | 474.00 mm18.661 in  |
| d1 - Cone Outside Diameter            | 585.00 mm23.032 in  |