


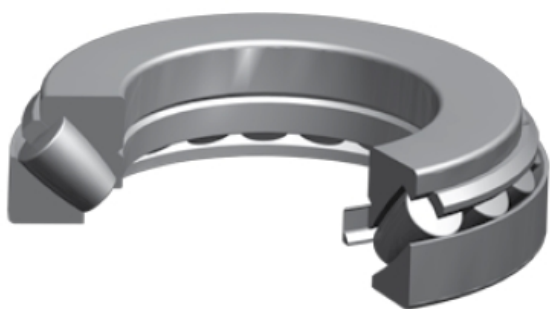

Bearing No. 292/600EM

Weight	322.00 mm12.677 in
Thermal Speed Rating	152.0 Kg335.1 lb
T3 - Cup Width	400 rpm
T1 - Cage Position	64.00 mm2.520 in
T - Total Width	82.90 mm3.264 in
Static Load Rating	122.00 mm4.803 in
S - Dimension	21920 kN4927000 lbf
r - Fillet Radius	4.0 mm0.16 in
H - Shoulder Diameter - Shaft (Min)	718.00 mm28.270 in
E - Shoulder Diameter - Housing (Max)	699.00 mm27.520 in
Dynamic Load Rating	4370 kN981600 lbf
D1 - Cup Bore	677.00 mm26.654 in
d1 - Cone Outside Diameter	750.00 mm29.528 in