


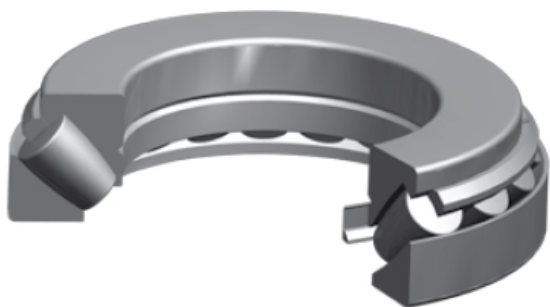

Bearing No. 292/630EM

Weight	338.00 mm13.307 in
Thermal Speed Rating	195.0 Kg430.0 lb
T3 - Cup Width	380 rpm
T1 - Cage Position	71.50 mm2.815 in
T - Total Width	90.32 mm3.556 in
Static Load Rating	132.00 mm5.197 in
S - Dimension	25800 kN5800000 lbf
r - Fillet Radius	5.00 mm0.197 in
H - Shoulder Diameter - Shaft (Min)	738.00 mm29.060 in
E - Shoulder Diameter - Housing (Max)	759.00 mm29.880 in
Dynamic Load Rating	5040 kN1133000 lbf
D1 - Cup Bore	712.00 mm28.031 in
d1 - Cone Outside Diameter	796.00 mm31.339 in