


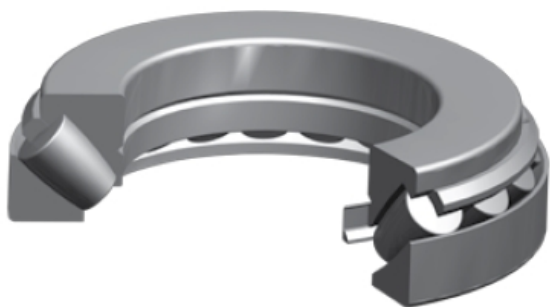

Bearing No. 294/670EM

Weight	391.00 mm15.394 in
Thermal Speed Rating	1159.4 Kg2538.3 lb
T3 - Cup Width	230 rpm
T1 - Cage Position	150.00 mm5.906 in
T - Total Width	209.25 mm8.238 in
Static Load Rating	290.00 mm11.417 in
S - Dimension	71970 kN16179000 lbf
r - Fillet Radius	12.00 mm0.470 in
H - Shoulder Diameter - Shaft (Min)	946.00 mm37.240 in
E - Shoulder Diameter - Housing (Max)	899.00 mm35.390 in
Dynamic Load Rating	17030 kN3829000 lbf
D1 - Cup Bore	830.00 mm32.677 in
d1 - Cone Outside Diameter	1029.00 mm40.512 in