


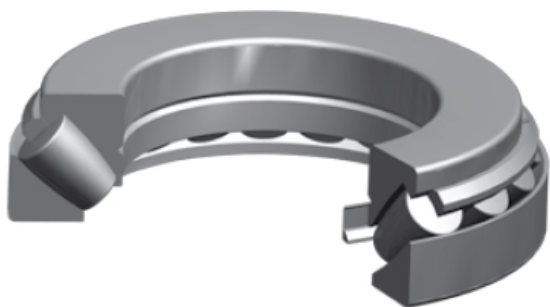

Bearing No. 294/750EM

|                                       |                      |
|---------------------------------------|----------------------|
| Weight                                | 439.00 mm17.283 in   |
| Thermal Speed Rating                  | 1537.0 Kg3388.4 lb   |
| T3 - Cup Width                        | 200 rpm              |
| T1 - Cage Position                    | 163.00 mm6.417 in    |
| T - Total Width                       | 226.81 mm8.929 in    |
| Static Load Rating                    | 315.00 mm12.402 in   |
| S - Dimension                         | 87900 kN19761000 lbf |
| r - Fillet Radius                     | 12.00 mm0.470 in     |
| H - Shoulder Diameter - Shaft (Min)   | 1054.00 mm41.500 in  |
| E - Shoulder Diameter - Housing (Max) | 1002.00 mm39.450 in  |
| Dynamic Load Rating                   | 20560 kN4621000 lbf  |
| D1 - Cup Bore                         | 929.00 mm36.575 in   |
| d1 - Cone Outside Diameter            | 1146.00 mm45.118 in  |