


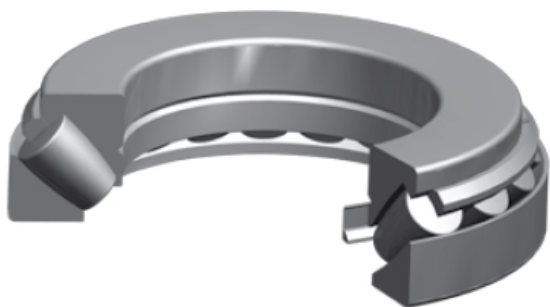

Bearing No. 294/850EM

|                                       |                       |
|---------------------------------------|-----------------------|
| Weight                                | 495.00 mm19.488 in    |
| Thermal Speed Rating                  | 2156.0 Kg4753.0 lb    |
| T3 - Cup Width                        | 170 rpm               |
| T1 - Cage Position                    | 181.00 mm7.126 in     |
| T - Total Width                       | 253.10 mm9.960 in     |
| Static Load Rating                    | 354.09 mm13.940 in    |
| S - Dimension                         | 109310 kN24574000 lbf |
| r - Fillet Radius                     | 12.00 mm0.470 in      |
| H - Shoulder Diameter - Shaft (Min)   | 1190.00 mm46.850 in   |
| E - Shoulder Diameter - Housing (Max) | 1131.00 mm44.530 in   |
| Dynamic Load Rating                   | 25250 kN5677000 lbf   |
| D1 - Cup Bore                         | 1053.00 mm41.457 in   |
| d1 - Cone Outside Diameter            | 1290.00 mm50.787 in   |