


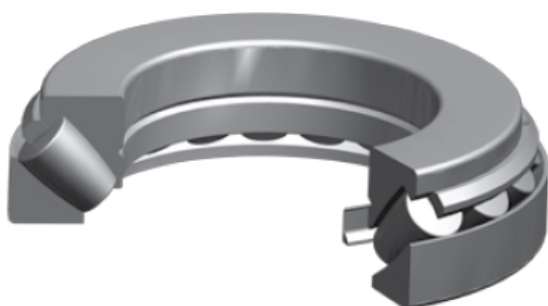

Bearing No. 294/530EM

Weight	310.00 mm12.205 in
Thermal Speed Rating	609.5 Kg1343.8 lb
T3 - Cup Width	300 rpm
T1 - Cage Position	124.00 mm4.882 in
T - Total Width	171.42 mm6.749 in
Static Load Rating	236.00 mm9.291 in
S - Dimension	47120 kN10593000 lbf
r - Fillet Radius	8.00 mm0.310 in
H - Shoulder Diameter - Shaft (Min)	753.00 mm29.650 in
E - Shoulder Diameter - Housing (Max)	716.00 mm28.190 in
Dynamic Load Rating	11440 kN2572000 lbf
D1 - Cup Bore	657.00 mm25.866 in
d1 - Cone Outside Diameter	823.00 mm32.402 in