


Bearing No. HK2212

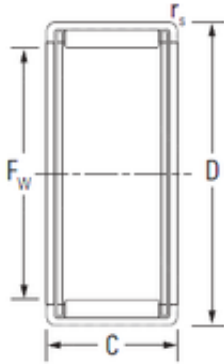

D	28 mm
C	12 mm
Cr	9.81
Fw	22 mm
Cu	2.20
C0r	14.50
Noun	Bearing
Bore	0.866 Inch 22 Millimeter
Width	0.472 Inch 12 Millimeter
UNSPSC	31171512
Weight	0.015 Kg
C3(min)	\
rs(min)	1
r5 min.	1 mm
Category	Needle Non Thrust Roller Bearing
Oil lub.	15000
Retainer	Yes
Inventory	0.0
Size (mm)	22x28x12
Separable	No
Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Closed End	No
Width (mm)	12
Grease lub.	9600
Bearing No.	HK2212
Weight / LBS	0.033

Product Group	B04144
Inch - Metric	Metric
Self Aligning	No
Keyword String	Needle
Bearing number	HK2212
Other Features	2 Rib Outer Ring Drawn Cup Bearing Steel Cage
Thrust Bearing	No
Relubricatable	No
Rolling Element	Needle Roller Bearing
Long Description	22MM Bore; 28MM Outside Diameter; 12MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; No Separable; N
Manufacturer URL	http://www.koyousa.com
(Refer.)Mass(kg)	0.015
Outside Diameter	1.102 Inch 28 Millimeter
Manufacturer Name	KOYO
Weight / Kilogram	0.016
Bore Diameter (mm)	22
Outer Diameter (mm)	28
Mounting inner ring	JR17x22x13
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	HK2212
Number of Rows of Rollers	Single Row

(Grease) Lubrication Speed	9600 r/min
Basic static load rating (C0)	14.50 kN
Basic dynamic load rating (C)	9.81 kN