


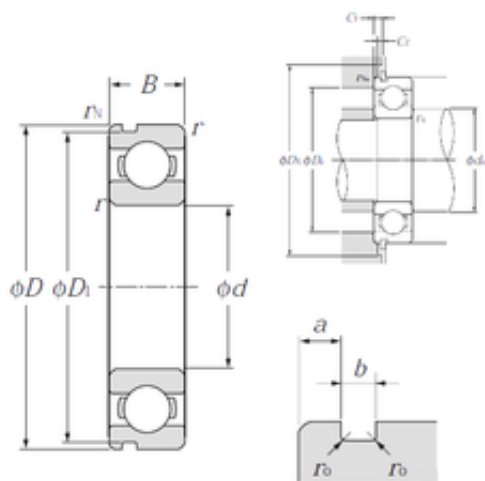

Bearing No. 6020N

a	3,71 mm
b	3,1 mm
d	100 mm
D	150 mm
B	24 mm
C	24 mm
Cz	2,9 mm
Dx	162 mm
D1	145,24 mm
Cy	6,1 mm
rn	0,5 mm
Noun	Bearing
Bore	3.937 Inch 100 Millimeter
r min.	1,5 mm
UNSPSC	31171504
Weight	1,15 Kg
da max	110 mm
r0 max.	0,6 mm
da min.	108 mm
Da max.	142 mm
ra max.	1,5 mm
Category	Single Row Ball Bearing
Enclosure	Open
Size (mm)	100x150x24
Inventory	0.0
Snap Ring	Yes
Width (mm)	24
Weight / LBS	2.7778
Inch - Metric	Metric

Cage Material	Steel
Product Group	B00308
Keyword String	Ball
Other Features	Deep Groove With Snap Ring Groove
Bearing number	6020N
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	5.906 Inch 150 Millimeter
Weight / Kilogram	1.225
Manufacturer Name	NTN
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5 000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	4 200 r/min

Basic static load rating (C0)	54 kN
Basic dynamic load rating (C)	60 kN
Maximum Capacity / Filling Slot	No