


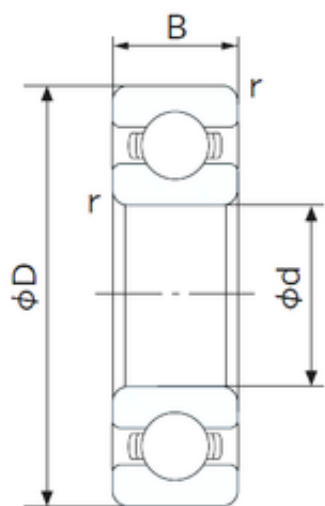

Bearing No. 6021

D	160 mm
d	105 mm
B	26 mm
C	26 mm
Noun	Bearing
Bore	4.134 Inch 105 Millimeter
Width	26 mm
UNSPSC	31171504
r min.	2 mm
Weight	1.60 Kg
da min.	113 mm
Da max.	152 mm
ra max.	2.0 mm
Category	Single Row Ball Bearing
ra (max)	2 mm
da (min)	113 mm
Da (max)	152 mm
Bore Size	105 mm
Factor fo	15.8
Inventory	0.0
Bore Type	Cylindrical Bore
Enclosure	Open
Snap Ring	No
Size (mm)	105x160x26
Width (mm)	26
Inch - Metric	Metric
Configuration	Single Row
Product Group	B00308
Cage Material	Steel

Keyword String	Ball
Other Features	Deep Groove
Bearing number	6021
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	105MM Bore; 160MM Outside Diameter; 26MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	6.299 Inch 160 Millimeter
Radial Clearance	0.015 to 0.041 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outer Race Width	1.024 Inch 26 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	65,500 N
Bore Diameter (mm)	105
Dynamic Load Rating	72,500 N
Outer Diameter (mm)	160
Minimum Buy Quantity	N/A
Limiting Speed - Oil	4,800 rpm
Fillet Radius/Chamfer	2 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,000 rpm
Internal Special	No

Features	
(Grease) Lubrication Speed	4000 r/min
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	72,5 kN
Maximum Capacity / Filling Slot	No