


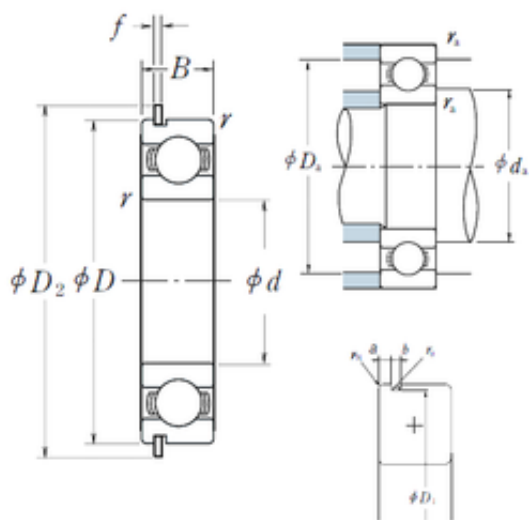

Bearing No. 6021NR

f	2,82 mm
r	2
d	105 mm
D	160 mm
B	26 mm
C	26 mm
a	3,71 mm
b	3,1 mm
D2	169,7 mm
B_	26
Cy	6.1
ra	2
C0	66
fo	15.8
D_	160
D1	155,22 mm
rn	0,5 mm
Z_	15
Dx	172
ro	0.6
DE_	151.169
DA_	16.669
SRI	8.63
D_a	151
SRE	8.63
DI_	117.831
SRIN	-0.03
yobi	6021NR
SBRG	10
bomp	0

SREX	0.03
KBRG	6101
SREN	-0.03
SDM_	134.5
SRIX	0.03
mass	1.58
C_conv	72500
r min.	2 mm
da max	120 mm
ALPHA_	0
Weight	1,58 Kg
da min	114
LangID	1
GRS rpm	4000
Da max.	151 mm
hidYobi	6021NR
Oil rpm	4800
da min.	114 mm
r0 max.	0,6 mm
ra max.	2 mm
hidTable	ecat_NSRDGB
Size (mm)	105x160x26
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	26
Bearing number	6021NR
Bore Diameter (mm)	105
Outer Diameter (mm)	160
(Oil) Lubrication Speed	4 800 r/min
(Grease) Lubrication Speed	4 000 r/min
Basic dynamic load rating (C)	72,5 kN
Basic static load rating	66 kN

(C0)	
------	--