




Bearing No. NKI10/20

D	22 mm
d	10 mm
B	20 mm
F	14 mm
s	0,5 mm / Axial displacement
m	37,1 g / Weight
Bore	0.394 Inch 10 Millimeter
Noun	Bearing
Width	0.787 Inch 20 Millimeter
UNSPSC	31171512
Category	Needle Non Thrust Roller Bearing
Retainer	Yes
Enclosure	Open
Component	Complete with Outer and Inner Ring
Size (mm)	10x22x20
Inventory	26.0
Separable	Inner Ring - Both Sides
Width (mm)	20
Closed End	No
Weight / LBS	0.082
n_B	17000 1/min / Reference speed
Product Group	B04144
C_r	14500 N / Dynamic load rating (radial)
Self Aligning	No
Inch - Metric	Metric

n_G	24600 1/min / Limiting speed
Other Features	Plain Inner Ring 2 Rib Outer Ring Radial Precision Steel Cage Ground Raceway with Rib Oil Hole
Thrust Bearing	No
Relubricatable	Yes
Keyword String	Needle
Bearing number	NKI10/20
C_{ur}	2700 N / Fatigue limit load, radial
C_{Or}	15600 N / Static load rating (radial)
r_{min}	0,3 mm
Rolling Element	Needle Roller Bearing
Long Description	10MM Bore; 22MM Outside Diameter; 20MM Width; Needle Roller Bearing; Complete with Outer and Inner Ring; Open; Not Self Aligning; Retainer; Single Row of Rollers; Inner Ring - Both Sides Separable; No
Manufacturer URL	http://www.ina.com
Outside Diameter	0.866 Inch 22 Millimeter
Weight / Kilogram	0.04
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	10
Outer Diameter (mm)	22
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00

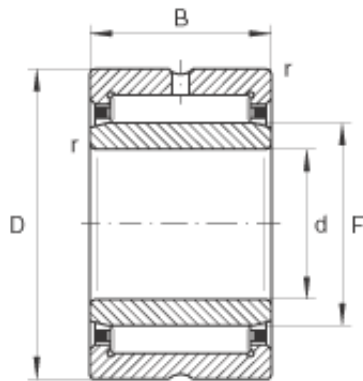

Manufacturer Item Number	NKI10/20
Number of Rows of Rollers	Single Row