


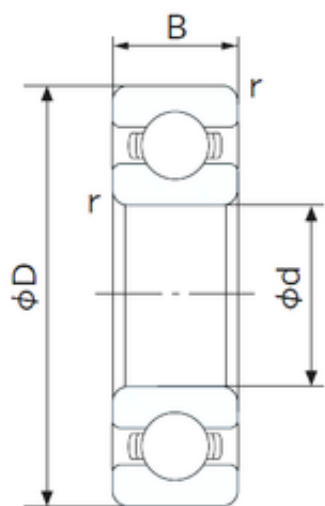

Bearing No. 16015

C	13 mm
d	75 mm
D	115 mm
B	13 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Width	13 mm
Weight	0.457 Kg
UNSPSC	31171504
r min.	0.6 mm
Da max.	108 mm
ra max.	0.6 mm
da min.	82 mm
Category	Single Row Ball Bearing
Da (max)	108 mm
da (min)	82 mm
ra (max)	0.6 mm
Bore Size	75 mm
Inventory	0.0
Bore Type	Cylindrical Bore
Factor fo	16.4
Enclosure	Open
Snap Ring	No
Size (mm)	75x115x13
Width (mm)	13
Weight / LBS	1.01
Inch - Metric	Metric
Product Group	B00308
Configuration	Single Row

Keyword String	Ball
Bearing number	16015
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	75MM Bore; 115MM Outside Diameter; 13MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.512 Inch 13 Millimeter
Radial Clearance	0.010 to 0.030 mm
Manufacturer URL	http://www.nachi.com
Outside Diameter	4.528 Inch 115 Millimeter
Weight / Kilogram	0.458
Manufacturer Name	NACHI
Static Load Rating	25,300 N
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
Dynamic Load Rating	27,600 N
Outer Diameter (mm)	115
Minimum Buy Quantity	N/A
Limiting Speed - Oil	6,700 rpm
Fillet Radius/Chamfer	0.6 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	5,700 rpm
Manufacturer Item Number	16015 BNLS
Internal Special Features	No
(Grease) Lubrication Speed	5500 r/min

Basic static load rating (C0)	25,3 kN
Basic dynamic load rating (C)	27,6 kN
Maximum Capacity / Filling Slot	No