


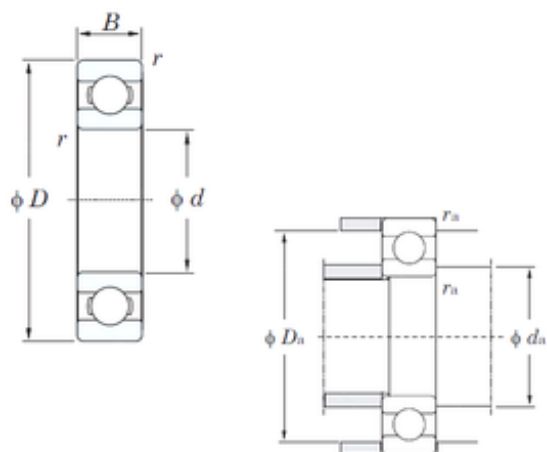

Bearing No. 6208

D	80 mm
d	40 mm
B	18 mm
C	18 mm
f0	14.0
Cu	1.25
Cr	36.4
C0r	17.8
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,366 Kg
r(min)	1.1
r min.	1,1 mm
da min.	46,5 mm
ra(max)	1
Da max.	73,5 mm
Da(max)	73.5
da(min)	46.5
ra max.	1 mm
Category	Single Row Ball Bearing
Oil lub.	10000
Inventory	0.0
Enclosure	Open
Size (mm)	40x80x18
Snap Ring	No
Width (mm)	18
Grease lub.	8300
Bearing No.	6208

Weight / LBS	0.885
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6208
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	3.15 Inch 80 Millimeter
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.709 Inch 18 Millimeter
(Refer.)Mass(kg)	0.366
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.402
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	10000 r/min
Manufacturer Item Number	6208
Internal Special Features	No
(Grease) Lubrication Speed	8300 r/min
Basic static load rating	17,8 kN

(C0)	
Basic dynamic load rating (C)	29,1 kN
Maximum Capacity / Filling Slot	No