


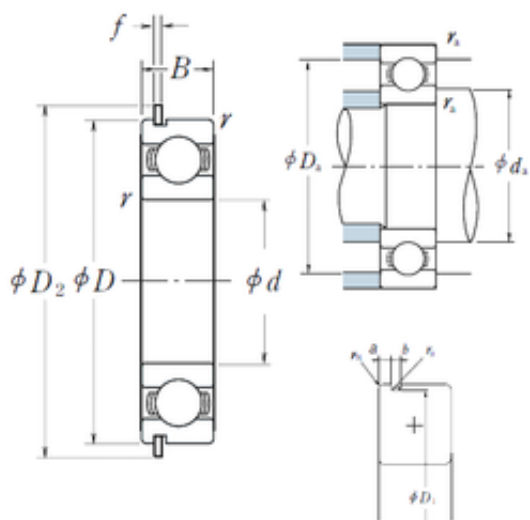

Bearing No. 6214NR

f	2,82 mm
r	1.5
d	70 mm
D	125 mm
B	24 mm
C	24 mm
a	4,06 mm
b	3,1 mm
D1	120,22 mm
fo	14.5
C0	44
ra	1.5
D2	134,7 mm
B_	24
Cy	6.5
Dx	136.5
rn	0,5 mm
ro	0.6
D_	125
Z_	10
SRE	9.04
D_a	117
SRI	9.04
DE_	114.962
DA_	17.462
DI_	80.038
bomp	0
SREX	0.03
yobi	6214NR
SBRG	2

KBRG	6101
SDM_	97.5
mass	1.09
Bore	2.756 Inch 70 Millimeter
SRIX	0.03
SRIN	-0.03
SREN	-0.03
Noun	Bearing
UNSPSC	31171504
LangID	1
r min.	1,5 mm
da max	84 mm
C_conv	62000
ALPHA_	0
Weight	1,09 Kg
da min	78
ra max.	1,5 mm
Da max.	117 mm
hidYobi	6214NR
Oil rpm	6300
da min.	78 mm
GRS rpm	5000
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	Yes
Size (mm)	70x125x24
Inventory	0.0
Enclosure	Open
bore type:	Round
Width (mm)	24
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	1.08
closure type:	Open
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6214NR
Keyword String	Ball
bore diameter:	70 mm
overall width:	24 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.921 Inch 125 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
outside diameter:	125 mm
Weight / Kilogram	1.15
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
Outer Diameter (mm)	125
internal clearance:	Normal Clearance
snap ring included:	With Snap Ring
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68

(Oil) Lubrication Speed	6 300 r/min
manufacturer upc number:	029176034794
Manufacturer Item Number	6214NR
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	44 kN
Basic dynamic load rating (C)	62 kN
Maximum Capacity / Filling Slot	No