


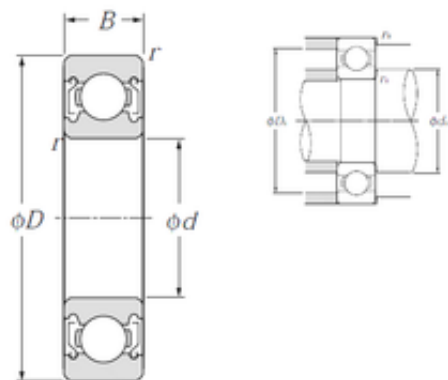

Bearing No. 6916ZZ

D	110 mm
d	80 mm
B	16 mm
C	16 mm
rn	0,5 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
da max	88 mm
r min.	1 mm
Weight	0,373 Kg
UNSPSC	31171504
da min.	85 mm
Da max.	105 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	80x110x16
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	16
Weight / LBS	0.809
Cage Material	Steel
Product Group	B00308
closure type:	Double Shielded
Inch - Metric	Metric
Other Features	Deep Groove Shell Alvania Prelubricated
bore diameter:	80 mm
Keyword String	Ball

overall width:	16 mm
Bearing number	6916ZZ
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.331 Inch 110 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	80MM Bore; 110MM Outside Diameter; 16MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0.366
outside diameter:	110 mm
Manufacturer Name	NTN
Internal Clearance	C0-Medium
Bore Diameter (mm)	80
internal clearance:	CN
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
manufacturer upc number:	4547359007022
Manufacturer Item Number	6916ZZ/2AS
Internal Special Features	No
(Grease) Lubrication Speed	5 700 r/min

Basic dynamic load rating (C)	24,9 kN
Basic static load rating (C0)	24 kN
Maximum Capacity / Filling Slot	No