


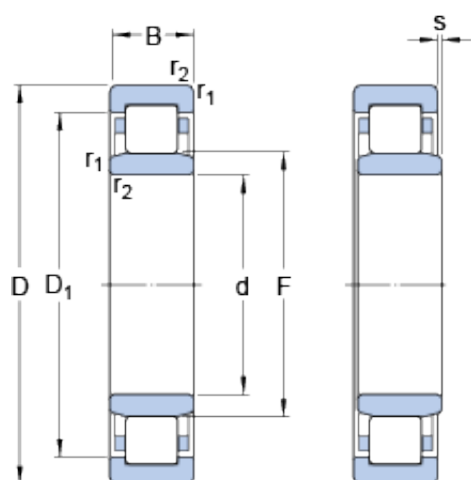

Bearing No. NU 2/600 ECMA/HB1

s	3 mm
d	600 mm
D	1090 mm
B	155 mm
F	749 mm
s max.	3 mm
Size (mm)	1090x600x155
Width (mm)	155
Mass bearing	710 kg
D_1	925 mm
Limiting speed	750 r/min
Bearing number	NU 2/600 ECMA/HB1
Reference speed	480 r/min
Limiting value e	0.2
Bore Diameter (mm)	1090
r_a max.	8 mm
D_a max.	1050 mm
d_b min.	755 mm
d_a max.	743 mm
d_a min.	640 mm
Axial load factor Y	0
Outer Diameter (mm)	600
d_a - max.	743 mm
d_a - min.	640 mm
r_a - max.	8 mm
$r_{1,2}$ min.	9.5 mm
D_a - max.	1050 mm
d_b - min.	755 mm
D_1 ?	925 mm
$r_{1,2}$ - min.	9.5 mm

Basic dynamic load rating C	5610 kN
Basic dynamic load rating - C	5610 kN
Fatigue load limit P_u	670 kN
Calculation factor k_r	0.15
Calculation factor - k_r	0.15
Fatigue load limit - P_u	670 kN
Basic static load rating C_0	9800 kN
Basic static load rating - C_0	9800 kN