


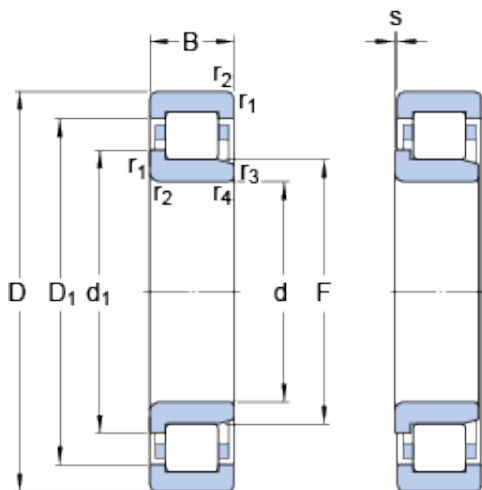

Bearing No. NJ 238 ECM

s	3 mm
d	190 mm
D	340 mm
B	55 mm
F	230 mm
s max.	3 mm
Size (mm)	340x190x55
Width (mm)	55
Mass bearing	23.3 kg
d ₁	244 mm
D ₁	293.8 mm
Limiting speed	3400 r/min
Bearing number	NJ 238 ECM
Reference speed	2000 r/min
Limiting value e	0.2
d _a min.	207 mm
Bore Diameter (mm)	340
D _a max.	321.9 mm
d _b min.	248 mm
r _a max.	3 mm
d _a max.	226 mm
Axial load factor Y	0.6
Outer Diameter (mm)	190
r _a - max.	3 mm
D _a - max.	321.9 mm
d _a - min.	207 mm
r _{3,4} min.	4 mm
d _b - min.	248 mm
d _a - max.	226 mm
r _{1,2} min.	4 mm

d_1 ?	244 mm
D_1 ?	293.8 mm
$r_{3,4}$ - min.	4 mm
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	800 kN
Basic dynamic load rating - C	800 kN
Fatigue load limit P_u	98 kN
Calculation factor k_r	0.15
Calculation factor - k_r	0.15
Fatigue load limit - P_u	98 kN
Basic static load rating C_0	965 kN
Basic static load rating - C_0	965 kN