


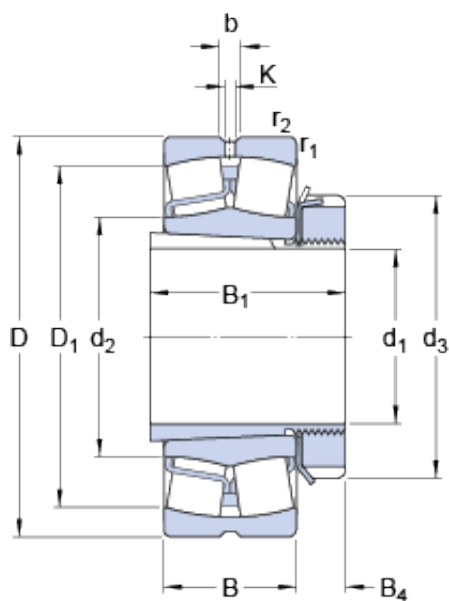

Bearing No. 21317 EK + H 317

D	180 mm
B	41 mm
b	6 mm
K	3 mm
Size (mm)	180x75x41
Width (mm)	41
d ₃	110 mm
d ₁	75 mm
B ₄	18 mm
B ₁	63 mm
d ₁	75 mm
d ₂	106 mm
D ₁	141 mm
B ₁	63 mm
B ₄	18 mm
d ₃	110 mm
Bearing number	21317 EK + H 317
Limiting speed	5300 r/min
Reference speed	3800 r/min
Bore Diameter (mm)	180
r _a max.	2.5 mm
B _a min.	7 mm
D _a max.	166 mm
d _b min.	91 mm
d _a max.	106 mm
Outer Diameter (mm)	75
Calculation factor e	0.24
r _{1,2} min.	3 mm
r _a - max.	2.5 mm

B_a - min.	7 mm
D_a - max.	166 mm
d_b - min.	91 mm
d_a - max.	106 mm
d_2 ?	106 mm
Mass bearing + sleeve	6.2 kg
D_1 ?	141 mm
Calculation factor - e	0.24
$r_{1,2}$ - min.	3 mm
Basic dynamic load rating C	331 kN
Basic dynamic load rating - C	331 kN
Fatigue load limit P_u	39 kN
Calculation factor Y_1	2.8
Calculation factor Y_2	4.2
Calculation factor Y_0	2.8
Calculation factor - Y_1	2.8
Calculation factor - Y_2	4.2
Fatigue load limit - P_u	39 kN
Basic static load rating C_0	375 kN
Basic static load rating - C_0	375 kN