


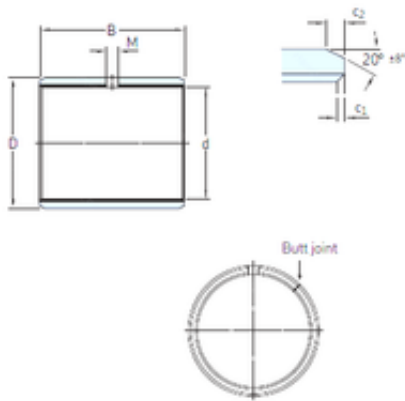

Bearing No. PCZ 1616 E

D	28,575 mm
d	25,4 mm
B	25,4 mm
M	– mm
c1 min	0,1 mm
c2 min	0,2 mm
Weight	0,026 Kg
UNSPSC	31171515
Category	Bearings
Inventory	0.0
Size (mm)	25.4x28.575x25.4
Width (mm)	25,4
Mass bushing	0.026 kg
? ±8	20 °
Product Group	B04264
Bearing number	PCZ 1616 E
Weight / Kilogram	0
Manufacturer Name	SKF
c ₁ min.	0.1 mm
c ₁ max.	0.7 mm
c ₂ min.	0.2 mm
c ₂ max.	1 mm
Bore Diameter (mm)	25,4
Outer Diameter (mm)	28,575
Minimum Buy Quantity	N/A
Housing bore range min.	28.565 mm
Housing bore range max.	28.59 mm
Shaft diameter range max.	25.377 mm
Shaft diameter range	25.347 mm

min.	
Basic dynamic load rating (C)	50 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding velocity v max.	2 m/s
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K ₀	250 N/mm ²
Basic dynamic load rating - radial direction C	50 kN
Basic static load rating - radial direction C ₀	156 kN
Factor depending on material and bearing type K _M	480