


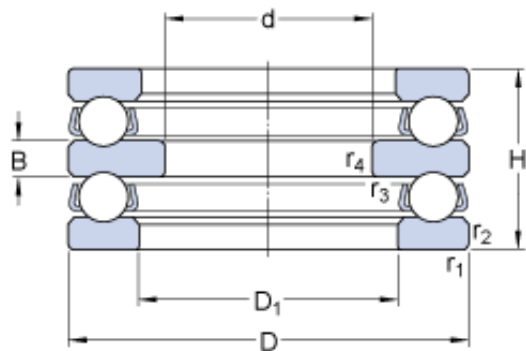

Bearing No. 52202

D	32 mm
d	10 mm
H	22 mm
B	5 mm
Noun	Bearing
Banded	No
Height	0.866 Inch 22 Millimeter
UNSPSC	31171552
Bore 1	0.394 Inch 10 Millimeter
Bore 2	0.669 Inch 17 Millimeter
Category	Thrust Ball Bearings
Size (mm)	32x10x22
Inventory	0.0
Width (mm)	22
Weight / LBS	0.17857
Product Group	B00308
D ₁	17 mm
Inch - Metric	Metric
Cage Material	Steel
d _a	15 mm
d _a	15 mm
Keyword String	Ball Thrust
Other Features	Double Row With Flat Seat
Thrust Bearing	Yes
Bearing number	52202
Limiting speed	7500 r/min
Rolling Element	Ball Bearing

Reference speed	5300 r/min
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.skf.com
Outside Diameter	1.26 Inch 32 Millimeter
Long Description	10MM Bore 1; 17MM Bore 2; 32MM Outside Diameter; 22MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer Name	SKF
Weight / Kilogram	0.085
D _a max.	22 mm
Bore Diameter (mm)	32
r _b max.	0.3 mm
r _a max.	0.6 mm
Outer Diameter (mm)	10
D _a - max.	22 mm
Minimum Buy Quantity	N/A
r _a - max.	0.6 mm
r _b - max.	0.3 mm
r _{3,4} min.	0.3 mm
r _{1,2} min.	0.6 mm
Component Description	Roller Assembly Plus Raceways
Minimum load factor A	0.0038
D ₁ ?	17 mm
Harmonized Tariff Code	8482.10.50.08
r _{3,4} - min.	0.3 mm
r _{1,2} - min.	0.6 mm
Minimum load factor - A	0.0038
Manufacturer Item Number	52202
Single or Double	Double Direction

Direction	
Basic dynamic load rating C	15.9 kN
Basic dynamic load rating - C	15.9 kN
Fatigue load limit P_u	0.915 kN
Fatigue load limit - P_u	0.915 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Basic static load rating C_0	25 kN
Basic static load rating - C_0	25 kN
Mass bearing (including seat washer where applicable)	0.081 kg