


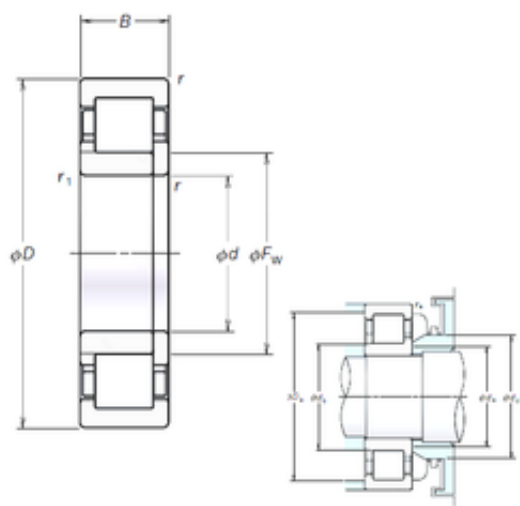

Bearing No. NUP318EM

r	3
D	190 mm
C	43 mm
S	1,5 mm
B	43 mm
d	90 mm
Fw	113,5 mm
Z_	13
r1	3
da	103
C0	355
ra	2.5
rb	2.5
B_	43
D_	190
DA_	28
DE_	169.5
DI_	113.5
yobi	NUP318EM
mass	6.29
SDM_	141.5
KBRG	4165
SBRG	3
db min	103 mm
C_conv	315000
Db max	177 mm
r min.	3 mm
ALPHA_	0
LangID	1
dd min	127

dc min	117
Weight	6,1 Kg
db max	111
da min.	103 mm
D_a max	177
r1 min.	3 mm
rb max.	2,5 mm
TSR rpm	4000
Da max.	177 mm
GRS rpm	3200
Oil rpm	3800
ra max.	2,5 mm
hidYobi	NUP318EM
db max.	111 mm
hidTable	ecat_NSCLDR
Macha rpm	6300
Size (mm)	90x190x43
Prod_Type3	CRB_SR_NUP
Width (mm)	43
Bearing number	NUP318EM
Bore Diameter (mm)	90
Outer Diameter (mm)	190
(Grease) Lubrication Speed	3200 r/min
Basic static load rating (C0)	355 kN
Basic dynamic load rating (C)	315 kN