


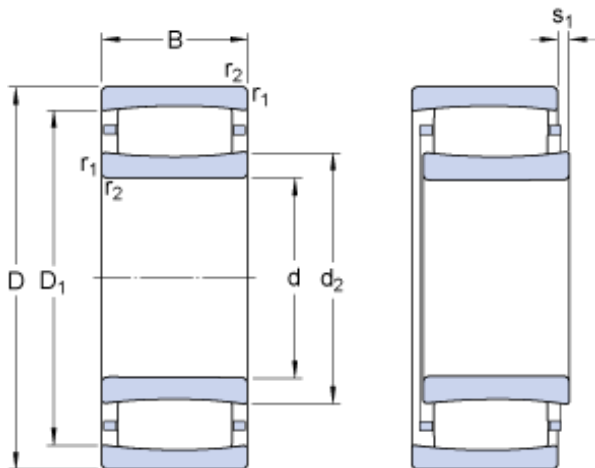

Bearing No. C 41/600 MB

D	980 mm
d	600 mm
B	375 mm
Size (mm)	980x600x375
Width (mm)	375
Mass bearing	1150 kg
s ₁	24.6 mm
d ₂	697 mm
D ₁	869 mm
Limiting speed	450 r/min
Bearing number	C 41/600 MB
Reference speed	340 r/min
d _a min.	632 mm
d _a max.	696 mm
s ₁ max.	24.6 mm
D _a min.	823 mm
D _a max.	948 mm
Bore Diameter (mm)	980
r _a max.	6 mm
C _a min.	5.5 mm
Outer Diameter (mm)	600
r _a - max.	6 mm
C _a - min.	5.5 mm
D _a - max.	948 mm
D _a - min.	823 mm
d _a - min.	632 mm
d _a - max.	696 mm
r _{1,2} min.	7.5 mm
d ₂ ?	697 mm
D ₁ ?	869 mm

$r_{1,2}$ - min.	7.5 mm
Factor - k_2	0.097
Factor - k_1	
Basic dynamic load rating C	12900 kN
Basic dynamic load rating - C	12900 kN
Fatigue load limit P_u	1460 kN
Misalignment factor k_1	0
Fatigue load limit - P_u	1460 kN
Basic static load rating C_0	23200 kN
Basic static load rating - C_0	23200 kN
Operating clearance factor k_2	0.097