


Bearing No. RSAO50

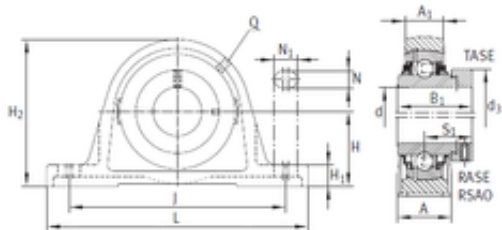

N	20 mm
d	50 mm
A	75 mm
H	75 mm
J	212 mm
L	275 mm
N1	35 mm
S1	42,1 mm
d3	75,8 mm
A1	39 mm
B1	66,8 mm
H1	27 mm
H2	143 mm
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	6,1 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	13.45
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Heavy Series Extended Inner

	Race With Set Screw
Bearing number	RSAO50
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	2.626 Inch 66.7 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 50MM Bore; 75MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 197MM Minimum Bolt Spacing; 227MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	6.107
Bore Diameter (mm)	50
Insert Part Number	GNE50KRRB
Bolt Spacing Minimum	7.756 Inch 197Millimeter
Bolt Spacing Maximum	8.937 Inch 227Millimeter
Minimum Buy Quantity	N/A
Base to Center Height	2.953 Inch 75 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RSAO50
Number of Mounting Holes	2
Expansion / Non-	Non-expansion

expansion	
Actual Bolt Center to Center	0 Inch 0Millimeter
Nominal Bolt Center to Center	8.3 Inch 210 Millimeter
Basic dynamic load rating (C)	62 kN