


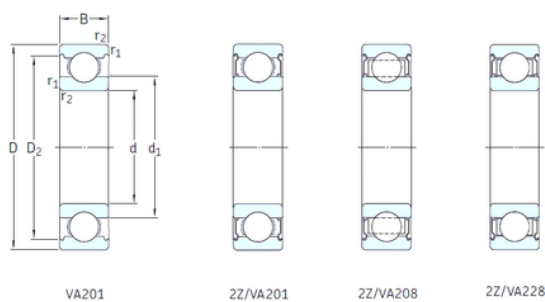

Bearing No. 6004/VA201

D	42 mm
d	20 mm
B	12 mm
C	12 mm
d1	27,2 mm
D2	37,2 mm
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
Weight	0,067 Kg
UNSPSC	31171504
r1 min.	0,6 mm
r2 min.	0,6 mm
Category	Single Row Ball Bearing
Enclosure	Open
Inventory	0.0
Snap Ring	No
Size (mm)	20x42x12
Width (mm)	12
Weight / LBS	0.067
Mass bearing	0.067 kg
Temperature -	30 to +250 °
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Keyword String	Ball
Limiting speed	290 r/min
Other Features	Deep Groove Extreme Temperature Variant
Bearing number	6004/VA201
Rolling Element	Ball Bearing

Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.skf.com
Outside Diameter	1.654 Inch 42 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
Long Description	20MM Bore; 42MM Outside Diameter; 12MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Polyalkylene Glycol/Graphite Mixture Filled Internal Special Features; C0-M
Manufacturer Name	SKF
Weight / Kilogram	0
D _a max.	38.8 mm
Bore Diameter (mm)	20
Internal Clearance	C0-Medium
r _a max.	0.6 mm
d _a min.	23.2 mm
Outer Diameter (mm)	42
Minimum Buy Quantity	N/A
r _{1,2} min.	0.6 mm
D ₂ ?	37.19 mm
d ₁ ?	27.2 mm
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	Polyalkylene Glycol/Graphite Mixture Filled
Basic dynamic load rating C	9.95 kN
Limiting temperature T max.	250 °C

Basic static load rating (C0)	5 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C ₀	5 kN