


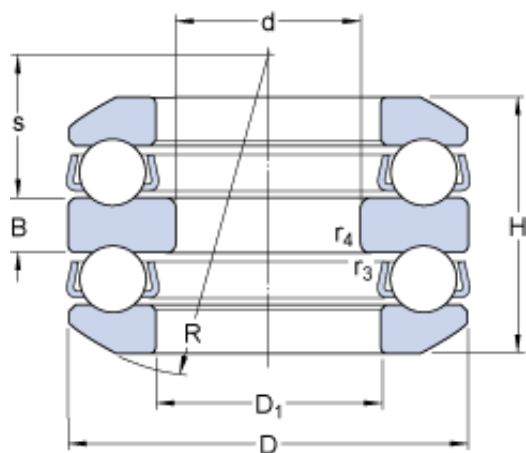

Bearing No. 54207 + U 207

R	50 mm
C	7 mm
d	30 mm
D	62 mm
H	37.8 mm
s	21 mm
B	8 mm
Size (mm)	62x30x37.8
Width (mm)	37,8
D ₃	65 mm
d _a	35 mm
d _a	35 mm
H ₁	42 mm
D ₂	48 mm
D ₃	65 mm
D ₂	48 mm
D ₁	37 mm
H ₁	42 mm
Limiting speed	4000 r/min
Bearing number	54207 + U 207
Reference speed	2800 r/min
r _b max.	0.3 mm
r _a max.	1 mm
D _a max.	48 mm
Bore Diameter (mm)	62
Outer Diameter (mm)	30
r _{3,4} min.	0.3 mm
r _{1,2} min.	1 mm
r _b - max.	0.3 mm

D_a - max.	48 mm
r_a - max.	1 mm
D_1 ?	37 mm
Minimum load factor A	0.028
$r_{3,4}$ - min.	0.3 mm
$r_{1,2}$ - min.	1 mm
Minimum load factor - A	0.028
Basic dynamic load rating C	35.1 kN
Basic dynamic load rating - C	35.1 kN
Fatigue load limit P_u	2.7 kN
Fatigue load limit - P_u	2.7 kN
Basic static load rating C_0	73.5 kN
Basic static load rating - C_0	73.5 kN
Mass bearing (including seat washer where applicable)	0.53 kg