


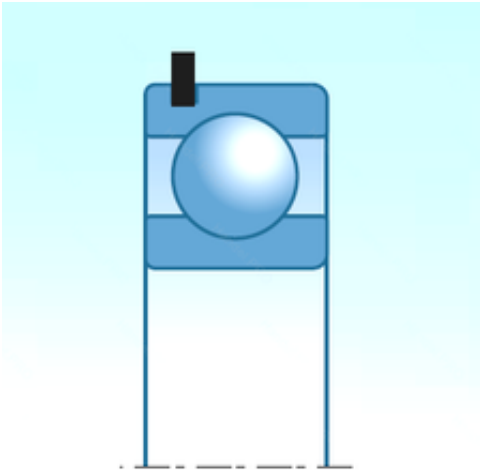

Bearing No. 6008LLBNR

C	15,000 mm
d	40,000 mm
B	15,000 mm
D	68,000 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Enclosure	2 Seals
Size (mm)	40x68x15
Snap Ring	Yes
Inventory	0.0
Width (mm)	15,000
bore type:	Round
maximum rpm:	6100 RPM
Weight / LBS	0.423
Cage Material	Steel
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Bearing number	6008LLBNR
bore diameter:	40 mm
overall width:	15 mm
fillet radius:	1 mm
cage material:	Steel
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer Name	NTN
outer ring width:	15 mm
inner ring width:	15 mm
Weight / Kilogram	0.191
bearing material:	High Carbon Chrome Steel
outside diameter:	68 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	40,000
Outer Diameter (mm)	68,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	10000 rpm
static load capacity:	11500 N
dynamic load capacity:	16800 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item	6008LLBNR/2A

Number	
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No