


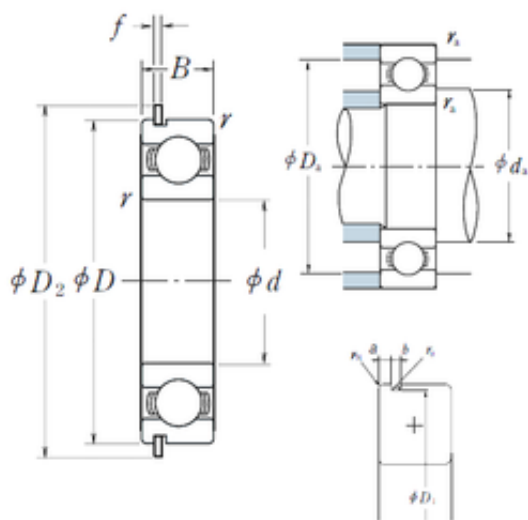

Bearing No. 6015NR

f	2,46 mm
r	1.1
d	75 mm
D	115 mm
B	20 mm
C	20 mm
a	2,87 mm
b	2,7 mm
D1	111,81 mm
fo	15.8
C0	33.5
ra	1
D2	121,6 mm
B_	20
Cy	5
Dx	123
rn	0,5 mm
ro	0.6
D_	115
Z_	15
SRE	6.16
D_a	108.5
SRI	6.16
DE_	106.906
DA_	11.906
DI_	83.094
bomp	0
SREX	0.025
yobi	6015NR
SBRG	10

KBRG	6101
SDM_	95
mass	0.649
Bore	2.953 Inch 75 Millimeter
SRIX	0.025
SRIN	-0.025
SREN	-0.025
Noun	Bearing
UNSPSC	31171504
LangID	1
r min.	1,1 mm
da max	85,5 mm
C_conv	39500
ALPHA_	0
da min	81.5
Weight	0,649 Kg
ra max.	1 mm
GRS rpm	5600
hidYobi	6015NR
Oil rpm	6700
Da max.	108,5 mm
r0 max.	0,6 mm
da min.	81,5 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	Yes
Size (mm)	75x115x20
Inventory	0.0
Enclosure	Open
Prod_Type3	DGBB_SR_NR_OT
bore type:	Round
Width (mm)	20

Weight / LBS	0.645
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6015NR
Keyword String	Ball
bore diameter:	75 mm
overall width:	20 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.528 Inch 115 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Long Description	75MM Bore; 115MM Outside Diameter; 20MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.29
Manufacturer Name	NSK
outside diameter:	115 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
snap ring included:	With Snap Ring
Outer Diameter (mm)	115
internal clearance:	Normal Clearance
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6 700 r/min

manufacturer upc number:	029176034381
Manufacturer Item Number	6015NR
Internal Special Features	No
(Grease) Lubrication Speed	5 600 r/min
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	39,5 kN
Maximum Capacity / Filling Slot	No