


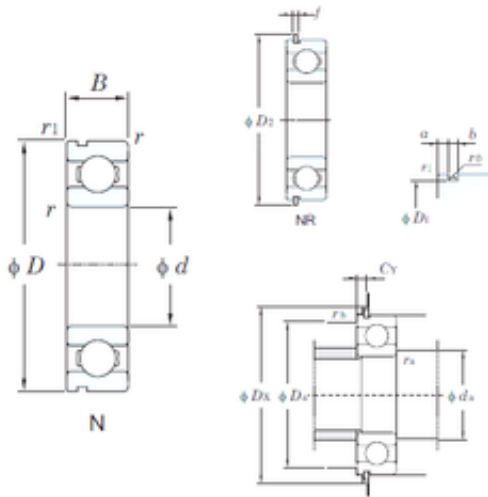

Bearing No. 6017NR

f	2,77 mm
d	85 mm
D	130 mm
B	22 mm
C	22 mm
a	2,87 mm
b	3,25 mm
Cr	61.8
f0	15.8
Cu	2.35
D2	139,7 mm
D1	125,22 mm
C0r	43.1
Bore	3.346 Inch 85 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,89 Kg
r1(min)	0.5
da(min)	91.5
D2(min)	139.7
Da(max)	123.5
rb(max)	0.5
ra(max)	1
Dx(min)	141.5
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	91,5 mm

Cy(max)	5.39
Da max.	123,5 mm
Category	Single Row Ball Bearing
Oil lub.	5900
Snap Ring	Yes
Size (mm)	85x130x22
Inventory	0.0
Enclosure	Open
Width (mm)	22
Grease lub.	5000
f{0.05)	2.77
Bearing No.	6017NR
Weight / LBS	1.96211
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6017NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Outer Race Width	0.866 Inch 22 Millimeter
(Refer.)Mass(kg)	0.890
Long Description	85MM Bore; 130MM Outside Diameter; 22MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outside Diameter	5.118 Inch 130 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.963
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	85
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5900 r/min
Internal Special Features	No
(Grease) Lubrication Speed	5000 r/min
Basic static load rating (C0)	43,1 kN
Basic dynamic load rating (C)	49,5 kN
Maximum Capacity / Filling Slot	No