


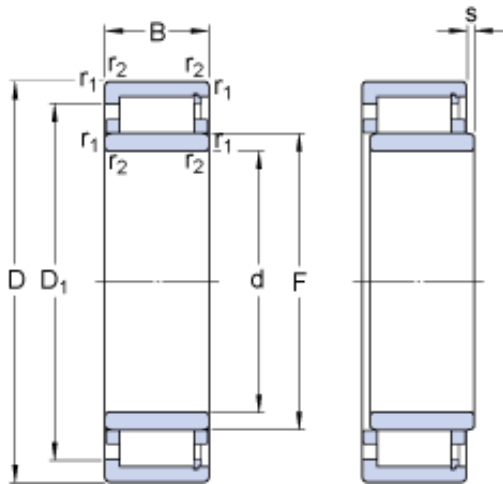

Bearing No. NUH 2338 ECMH/PEX

D	400 mm
d	190 mm
B	132 mm
F	240 mm
s	4.1 mm
s max.	4.1 mm
Size (mm)	400x190x132
Width (mm)	132
Mass bearing	78.6 kg
D ₁	341.2 mm
Limiting speed	2200 r/min
Bearing number	NUH 2338 ECMH/PEX
Reference speed	1700 r/min
Bore Diameter (mm)	400
r _a max.	4 mm
D _a max.	380 mm
D _a min.	351 mm
d _b min.	244 mm
d _a max.	234 mm
d _a min.	209 mm
Outer Diameter (mm)	190
d _a - max.	234 mm
r _{1,2} min.	5 mm
d _a - min.	209 mm
D _a - max.	380 mm
r _a - max.	4 mm
D _a - min.	351 mm
d _b - min.	244 mm
D ₁ ?	341.2 mm
r _{1,2} - min.	5 mm

Basic dynamic load rating C	2240 kN
Basic dynamic load rating - C	2240 kN
Fatigue load limit P_u	255 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	255 kN
Basic static load rating C_0	2750 kN
Basic static load rating - C_0	2750 kN