


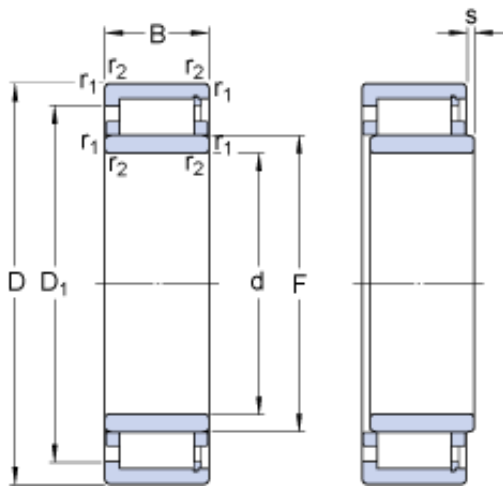

Bearing No. NUH 2340 ECMH/PEX

D	420 mm
d	200 mm
B	138 mm
F	253 mm
s	4.3 mm
s max.	4.3 mm
Size (mm)	420x200x138
Width (mm)	138
Mass bearing	92.7 kg
D ₁	357.6 mm
Limiting speed	2200 r/min
Bearing number	NUH 2340 ECMH/PEX
Reference speed	1600 r/min
Bore Diameter (mm)	420
r _a max.	4 mm
D _a max.	399.8 mm
D _a min.	367 mm
d _b min.	257 mm
d _a max.	247 mm
d _a min.	220 mm
Outer Diameter (mm)	200
d _a - max.	247 mm
r _{1,2} min.	5 mm
d _a - min.	220 mm
D _a - max.	399.8 mm
r _a - max.	4 mm
D _a - min.	367 mm
d _b - min.	257 mm
D ₁ ?	357.6 mm
r _{1,2} - min.	5 mm

Basic dynamic load rating C	2550 kN
Basic dynamic load rating - C	2550 kN
Fatigue load limit P_u	300 kN
Calculation factor k_r	0.2
Calculation factor - k_r	0.2
Fatigue load limit - P_u	300 kN
Basic static load rating C_0	3200 kN
Basic static load rating - C_0	3200 kN