


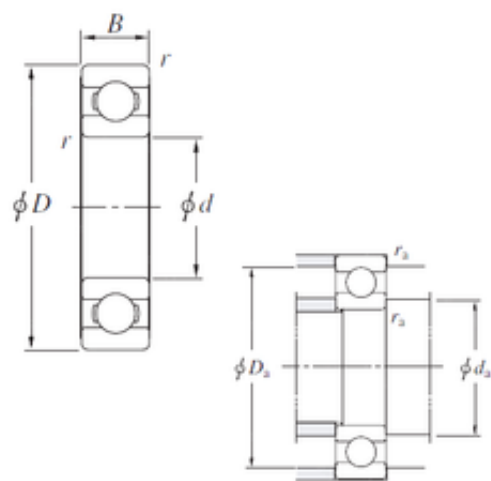

Bearing No. 6030

D	225 mm
d	150 mm
B	35 mm
C	35 mm
f0	16.0
Cu	5.10
Cr	157
C0r	126
Bore	5.906 Inch 150 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	4,22 Kg
r(min)	2.1
r min.	2,1 mm
da min.	161 mm
ra(max)	2
Da max.	214 mm
Da(max)	214
da(min)	161
ra max.	2 mm
Category	Single Row Ball Bearing
Oil lub.	3300
Inventory	0.0
Enclosure	Open
Size (mm)	150x225x35
Snap Ring	No
Width (mm)	35
Grease lub.	2800
Bearing No.	6030

Weight / LBS	10.048
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6030
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	1.378 Inch 35 Millimeter
Long Description	150MM Bore; 225MM Outside Diameter; 35MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	8.858 Inch 225 Millimeter
(Refer.)Mass(kg)	4.22
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	4.562
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	150
Outer Diameter (mm)	225
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	3300 r/min
Manufacturer Item Number	6030
Internal Special Features	No
(Grease) Lubrication Speed	2800 r/min

Basic static load rating (C0)	126 kN
Basic dynamic load rating (C)	125 kN
Maximum Capacity / Filling Slot	No