


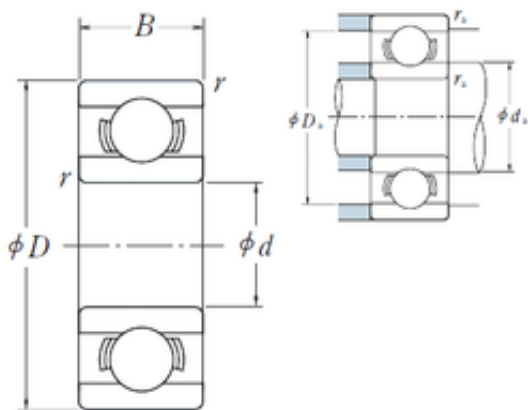

Bearing No. 607

C	6 mm
r	0.3
d	7 mm
D	19 mm
B	6 mm
D_	19
ra	0.3
fo	12.041
da	9
B0	6
Cr	238
B_	6
C0	0.885
Z_	6
D_a	17
DA_	3.5
DE_	16
SRE	1.96
C0r	90
SRI	1.8
DI_	9
Noun	Bearing
SRIX	0.015
Bore	0.276 Inch 7 Millimeter
SREX	0.03
SRIN	-0.015
mass	7.67
SREN	0
SDM_	12.5
KBRG	6101

yobi	607
r min.	0,3 mm
LangID	1
UNSPSC	31171504
Weight	0,00767 Kg
GRS rpm	36000
da min.	9 mm
hidYobi	607
Da max.	17 mm
ra max.	0,3 mm
Oil rpm	43000
Category	Single Row Ball Bearing
hidTable	ecat_NSESBM
Size (mm)	7x19x6
Inventory	0.0
Enclosure	Open
Snap Ring	No
Width (mm)	6
Prod_Type3	ESM_MD_OT
Weight / LBS	0.01652
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	607
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	0.748 Inch 19 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	7MM Bore; 19MM Outside Diameter; 6MM

	Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.236 Inch 6 Millimeter
Weight / Kilogram	0.008
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	7
Outer Diameter (mm)	19
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	36 000 r/min
Basic static load rating (C0)	0,885 kN
Basic dynamic load rating (C)	2,34 kN
Maximum Capacity / Filling Slot	No