


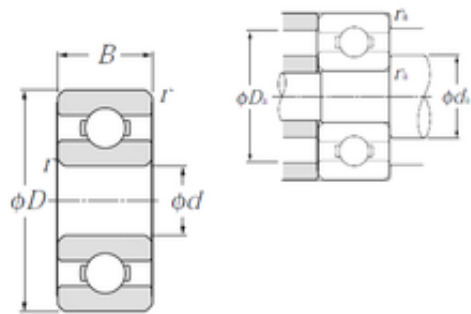

Bearing No. 607

D	19 mm
d	7 mm
B	6 mm
C	6 mm
f0	12.9
Mass	0.008 kg
Bore	0.276 Inch 7 Millimeter
Noun	Bearing
UNSPSC	31171504
ra max	0.3 mm
da min	9 mm
rs min	0.3 mm
Da max	17 mm
da max	10,4 mm
Weight	8 Kg
r min.	0,3 mm
ra max.	0,3 mm
Da max.	17 mm
da min.	9 mm
Category	Single Row Ball Bearing
Inventory	0.0
Snap Ring	No
Size (mm)	7x19x6
Enclosure	Open
Width (mm)	6
Nlim (oil)	40,000 rpm
Weight / LBS	0.018
Nlim (grease)	34,000 rpm
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Keyword String	Ball
Bearing number	607
Static load, C0	0.91 kN
Dynamic load, C	2.24 kN
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	7MM Bore; 19MM Outside Diameter; 6MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.snrbearings.com
Outer Race Width	0.236 Inch 6 Millimeter
Outside Diameter	0.748 Inch 19 Millimeter
Manufacturer Name	NTN
Weight / Kilogram	0.008
Internal Clearance	C0-Medium
Bore Diameter (mm)	7
Outer Diameter (mm)	19
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Fatigue limit load, Cu	0.04 kN
Radial clearance class	CN
(Oil) Lubrication Speed	40 000 r/min
Manufacturer Item Number	607
Internal Special Features	No
(Grease) Lubrication Speed	34 000 r/min

Basic static load rating (C0)	0,91 kN
Basic dynamic load rating (C)	2,24 kN
Maximum Capacity / Filling Slot	No
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C