


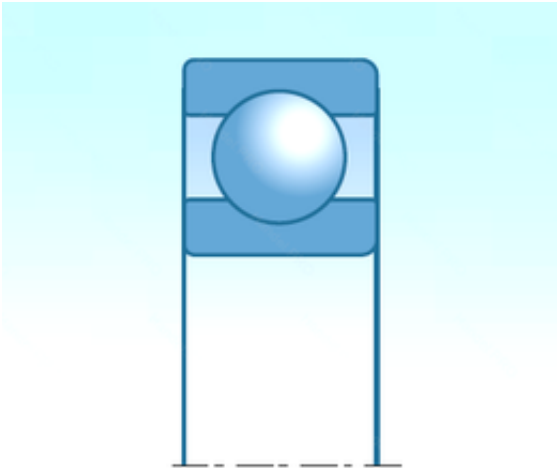

Bearing No. 607LLB

D	19,000 mm
C	6,000 mm
B	6,000 mm
d	7,000 mm
Noun	Bearing
Bore	0.276 Inch 7 Millimeter
UNSPSC	31171504
Category	Single Row Ball Bearing
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Size (mm)	7x19x6
Width (mm)	6,000
bore type:	Round
Weight / LBS	0.02645
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	607LLB
Keyword String	Ball
bore diameter:	7 mm
cage material:	Steel
overall width:	6 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Enclosure Type	Non-Contact Seal
fillet radius:	0.3 mm
Precision Class	ABEC 1 ISO P0

finish/coating:	Uncoated
Rolling Element	Ball Bearing
Long Description	7MM Bore; 19MM Outside Diameter; 6MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; No
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	0.748 Inch 19 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
Manufacturer URL	http://www.ntnamerica.com
outer ring width:	6 mm
Weight / Kilogram	0
outside diameter:	19 mm
precision rating:	ISO Class 0
inner ring width:	6 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	7,000
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
internal clearance:	CN
Outer Diameter (mm)	19,000
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	34000 rpm
static load capacity:	910 N

dynamic load capacity:	2240 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No