


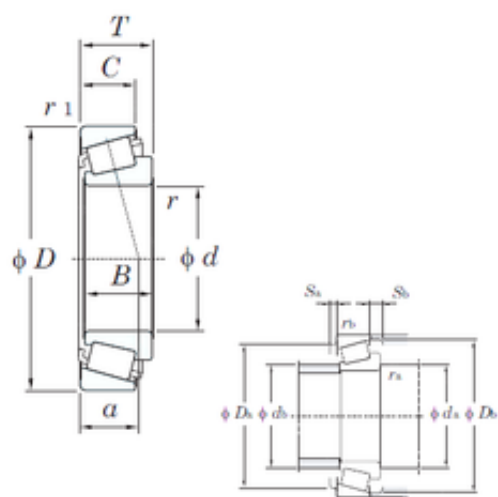

Bearing No. 32305XR

C	19 mm
e	0.55
d	25 mm
D	62 mm
T	25,25 mm
B	24 mm
a	18,9 mm
Y0	0.60
Y1	1.10
Cu	9.20
Cr	71.6
C0r	65.8
a(mm)	18.9
r min.	1,5 mm
da max	33 mm
Da min	46 mm
r(min)	1.5
Weight	0,39 Kg
r1(min)	1.5
db(max)	33
da(min)	33.5
Sb(min)	6
Da(max)	53.5
Sa(min)	3
Da(min)	46
ra(max)	1.5
rb(max)	1.5
Db(min)	58
rb max.	1,5 mm
ra max.	1,5 mm

Db min.	58 mm
Da max.	53,5 mm
da min.	33,5 mm
r2 min.	1,5 mm
Oil lub.	9300
Size (mm)	25x62x25.25
Width (mm)	25,25
Bearing No.	32305XR
Grease lub.	7000
Bearing number	32305XR
(Refer.)Mass(kg)	0.390
Bore Diameter (mm)	25
Outer Diameter (mm)	62
Calculation factor (e)	0,55
Calculation factor (Y0)	0,6
(Oil) Lubrication Speed	9300 r/min
(Grease) Lubrication Speed	7000 r/min
Basic static load rating (C0)	65,8 kN
Basic dynamic load rating (C)	57,2 kN