


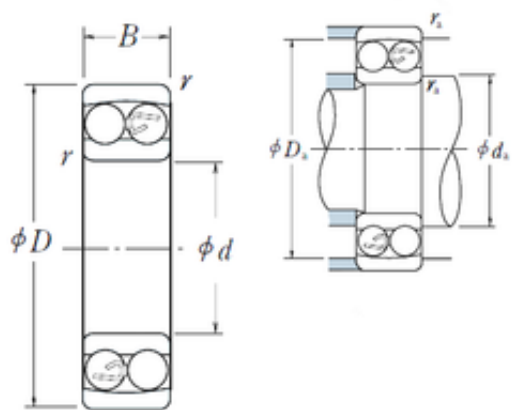

Bearing No. 1213

r	1.5
d	65 mm
D	120 mm
B	23 mm
C	23 mm
e	0.17
Y0	3.8
X1	1
B_	23
ra	1.5
Y2	5.7
D_	120
Y3	3.7
C0	12.5
X0	1
da	73
X2	0.65
PCD	93.5
D_a	112
SRI	5.83
SRE	0
mass	1.15
CAng	6.528
KBRG	1352
yobi	1213
SREX	0
SRIX	0.05
SRIN	0
SREN	0
r min.	1,5 mm

Weight	1,15 Kg
LangID	1
GRS rpm	4800
cyl dia	11.112
Oil rpm	6000
hidYobi	1213
da min.	73 mm
Da max.	112 mm
ra max.	1,5 mm
hidTable	ecat_NSSAB
cyl count	21
Size (mm)	65x120x23
Prod_Type3	SABB_SA_CB
Width (mm)	23
groove inner	82.384
groove outer	105.222
Bearing number	1213
Bore Diameter (mm)	65
Outer Diameter (mm)	120
Calculation factor (e)	0,17
(Oil) Lubrication Speed	6 000 r/min
Calculation factor (Y0)	3,8
Calculation factor (Y2)	5,7
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	12,5 kN
Basic dynamic load rating (C)	31 kN